

Flow meter programme In Touch with the Future

Turbine Wheel Meter TR Series
Swash Plate Meter TS Series
Oval Gear Meter HDO Series



Safety is our concern

You can count on Lutz already for a long time.

Precise work counts more than ever in laboratories as well as in production and fluid handling. Flow measurement therefore has to be rational, economical and - above all - practical, in mobile use as well as in stationary operation.


The precise recording of the liquid discharge ensures the quality of the work processes and the economic use of the operating resources.

You have been able to rely on the proven Lutz flow meters for almost 20 years - the new generation of meters will also inspire you.

- Turbine wheel meter TR
- Swash plate meter TS
- Oval gear meter HDO

Watch product
video



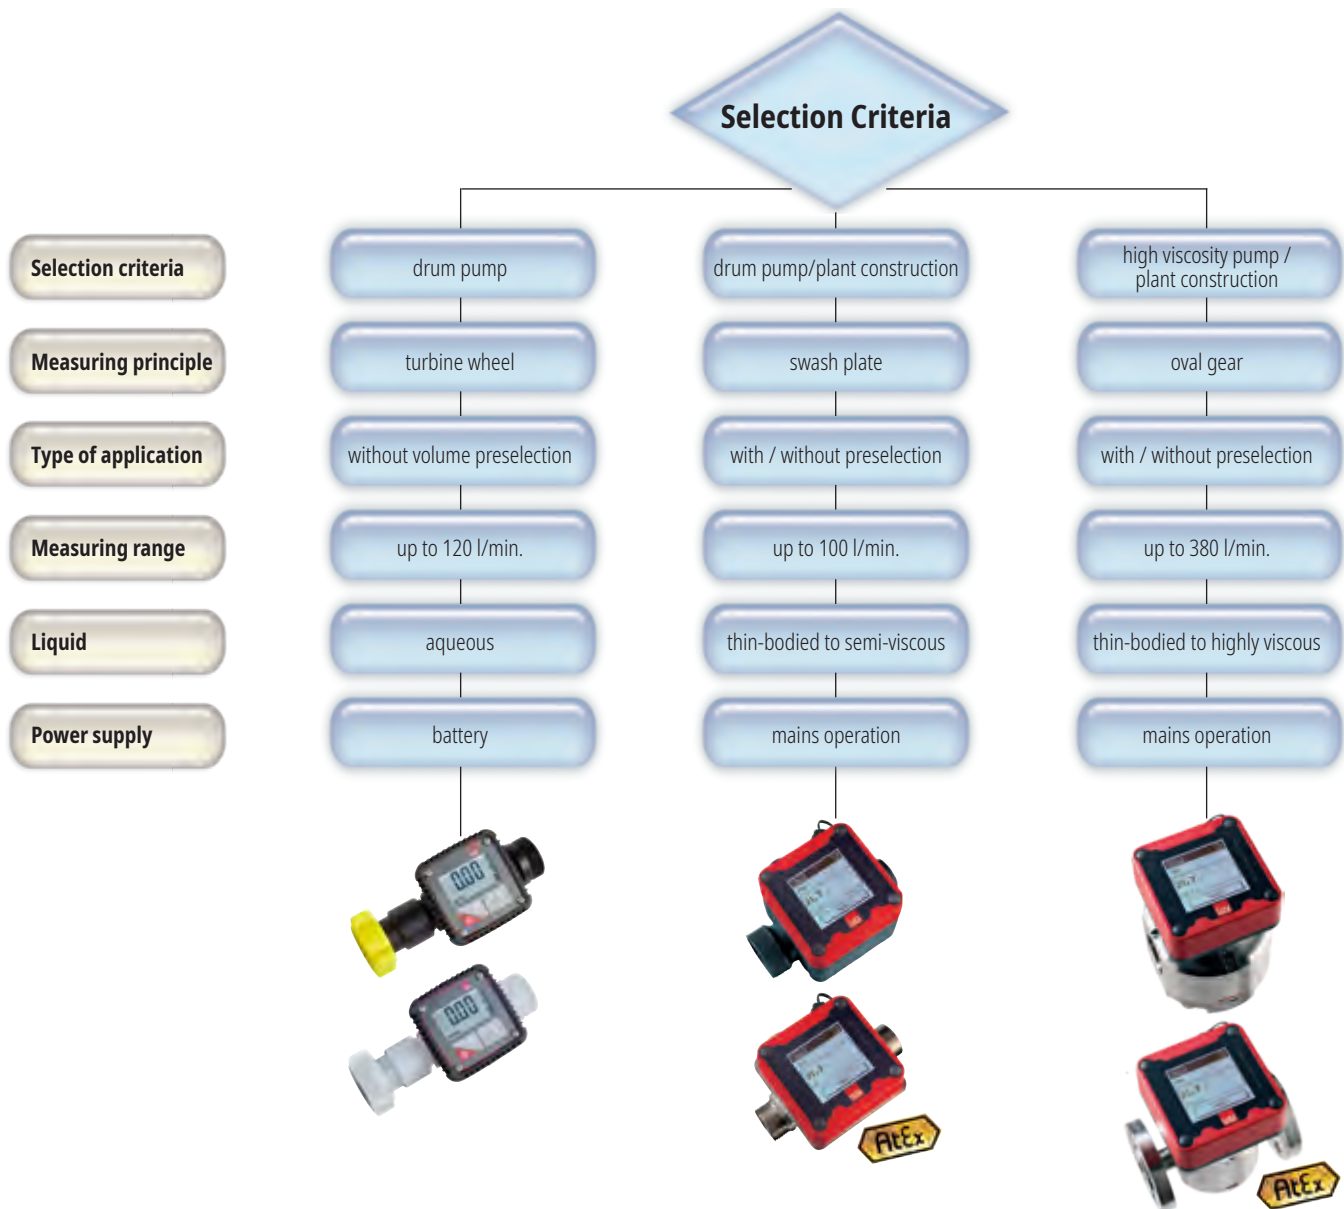

TR series

- ✓ Can be combined with all drum and container pumps
- ✓ Wide measuring range
- ✓ Also for small volume flows
- ✓ Partial volume resettable

(see page 4-5)

TS series

- ✓ Touch screen display
- ✓ Multilingual menu guidance
- ✓ Simple operation in plain text
- ✓ „Plug & Play“ module concept

(see page 6-15)

HDO series

- ✓ Touch screen display
- ✓ Multilingual menu guidance
- ✓ Simple operation in plain text
- ✓ „Plug & Play“ module concept
- ✓ For high flow rates, temperatures and pressures

(see page 16-23)

Lutz flow meter programme

The value for money Lutz flow meter TR




Easy to operate

Easy to operate, compact and quick to install on all drum and container pumps: The new Lutz flow meter TR3 in PP or PVDF. A flow meter, easy to handle, that you can "count on" in any situation. The symmetrical measuring chamber can be used for all flow directions and measures low-viscosity, non-flammable substances precisely, quickly and above all efficiently.

With drive to the measurement result

The new TR3 with illuminated, digital display according to the measuring principle of a turbine wheel meter has a two-line LED display showing the current output and the total memory or the 8 partial quantity memories. The display can be mounted adapted to the viewing angle or moved when mounted. The measuring accuracy is better than $\pm 1\%$, the nominal operating pressure is 10 bar.

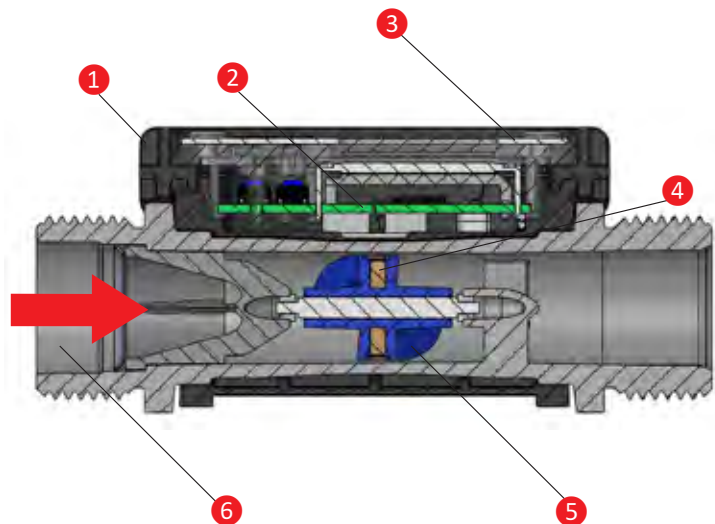

Benefits:

- Flexible assembly
- Variable display alignment
- Larger volume flow range
- Easy battery change

- 1 Upper part of the housing (PC) with shock protection (NBR)
- 2 Circuit board
- 3 Keyboard foil
- 4 Magnet
- 5 Axial turbine (PP or PVDF)
- 6 Measuring chamber (PP or PVDF)

The economic liquid volume meter

You have the free choice



PP pump for neutral and aggressive liquids

such as glycol, ferric(III)chloride, hydrochloric acid, phosphoric acid, etc.



PVDF for highly aggressive fluids

such as sodium hypochlorite, nitric acid, sulphuric acid



Lutz offers you complete systems for laboratory and pilot plant. The pump set Lutz B2 Battery and Vario can optionally be supplemented with the flow meter TR3-PP (order no. 0213-051).

Type		TR3-PP		TR3-PVDF	
Material	Cover	PC		PC	
	Housing	POM		POM	
	Keyboard	PES		PES	
	Shock protection	NBR		NBR	
Material (in contact with liquid)	Measuring chamber	PP		PVDF	
	Rotor	PP		PVDF	
	Shaft	Hastelloy C-22		Hastelloy C-22	
	Bearing ball	PTFE		PTFE	
	Seal	PTFE		PTFE	
Measuring range		5-120 l/min.		5-120 l/min.	
Range of viscosity		0,8-40 mPas		0,8-40 mPas	
max. operating pressure		10 bar		10 bar	
Measuring accuracy uncalibrated		± 2%*		± 2%*	
Measuring accuracy (calibrated)		± 1%*		± 1%*	
Repeat accuracy		± 0.5%		± 0.5%	
Connection thread		G 1	G 1 1/4	G 1	G 1 1/4
Protection class		IP 65		IP 65	
Battery		Two 1.5 V batteries (AAA) replaceable		Two 1.5 V batteries (AAA) replaceable	
Temperature range		-10 to +50 °C		-10 to +50 °C	
Dimensions		85 x 123 x 52 mm		85 x 123 x 52 mm	
Weight		0.22 kg		0.24 kg	
Order no. Mounting on B1/B2 Battery/B2 Vario		0213-051	–	0213-061	–
Order no. Mounting on drum pump		–	0213-050	–	0213-060
Order no. Mounting on nozzle		–	0213-052	–	0213-062

* Testassembly: Medium water / diesel, flow in preferred direction, settling section 0.2 m upstream and downstream of flow meter

Lutz flow meter programme

Series TS: Swash plate principle



Product features


The flow meters in plastic and metal design work according to the swash plate principle. They are suitable for pumping neutral, aggressive, flammable and viscous liquids.

- Wide range of applications
- Also in PURE version


Everything under control This is how TS works

The flowing liquid causes a swash plate to rotate around its own axis. A magnet with several poles is set in rotation via a "coupling".

This switches a reed contact through the cover of the housing. The volume of the liquid flowing through results from the number of the detected pulses.

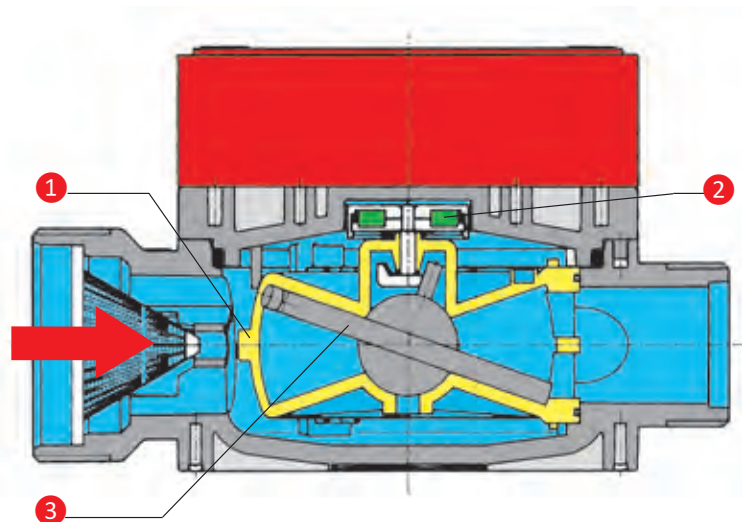

- ① measuring chamber
- ② Magnet
- ③ Swash plate

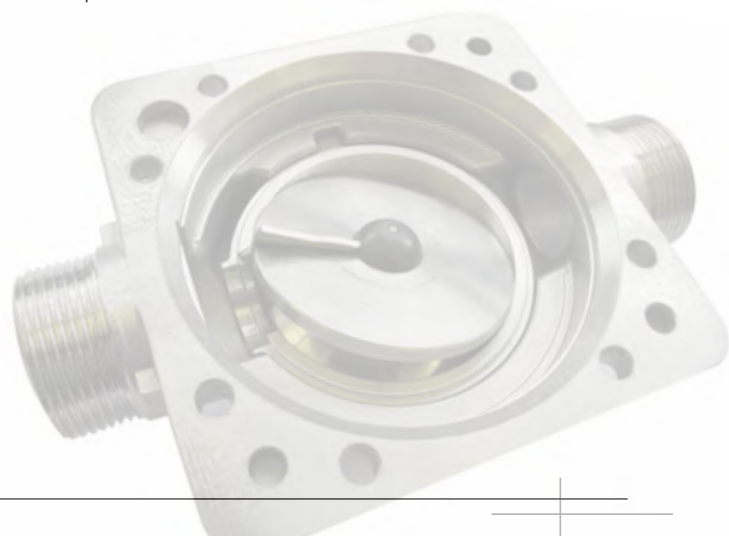

Lutz flow meter programme

The innovative Lutz flow meter TS

There are a lot of measuring devices for fluids. But the advantages of the new Lutz flow meters stand out from them all. Therefore, let yourself be convinced by the outstanding precision, flexibility and user-friendliness.

Watch product
video



Discover the advantages of innovative Lutz technology:

- + Touchscreen display
- + Multilingual menu guidance
- + Simple operation in plain text
- + Integrated help function
- + High measuring accuracy due to overrun correction
- + Safety and monitoring functions
- + Simple system connection
- + „Plug & Play“ module concept



Easy to use at a high level.

The first flow meter with **touchscreen display** and backlight convinces with its simple, demand-oriented display and operability, the **multilingual interface** and the compact design.

The **user guidance with clear text instructions, system messages and assistance texts** as well as **safety and monitoring functions** almost exclude errors. It can also be operated manually or by external control.

■ **In Touch with the Future.**





Simply convenient: Flow measurement with volume preselection.

The relay module, an intelligent "building block" of the Lutz meter innovation helps you to automatise work processes and thus make them more efficient.

The desired quantity can simply be preselected and started by pressing a key. Whether for mobile operation with a drum pump, or for controlling complex systems: The convenient volume preselection makes your processes easier and safer. The pump, the system and/or the solenoid valve are switched on and off by the integrated electronics.

■ **Precise, safe and economical.**




Combine as required. Easy to assemble.

The Lutz flow meter can be integrated into your system very quickly and without wiring work thanks to confusion-proof plug-in connections. Individual modules such as the basic flow meter, the operating unit or the relay module can be assembled, combined and installed with the new connection system as in a modular system.

Flexible in use The variety of possibilities:

- Food, luxury food and beverage industry
- Paint and lacquer industry
- Pharmaceuticals and cosmetics
- Plant and apparatus construction
- Chemical industry
- Petrochemistry
- Chemicals and mineral oil trade
- Machine factories & metal processing
- Automotive industry & suppliers
- Electroplating and surface treatment
- Engineering and design offices



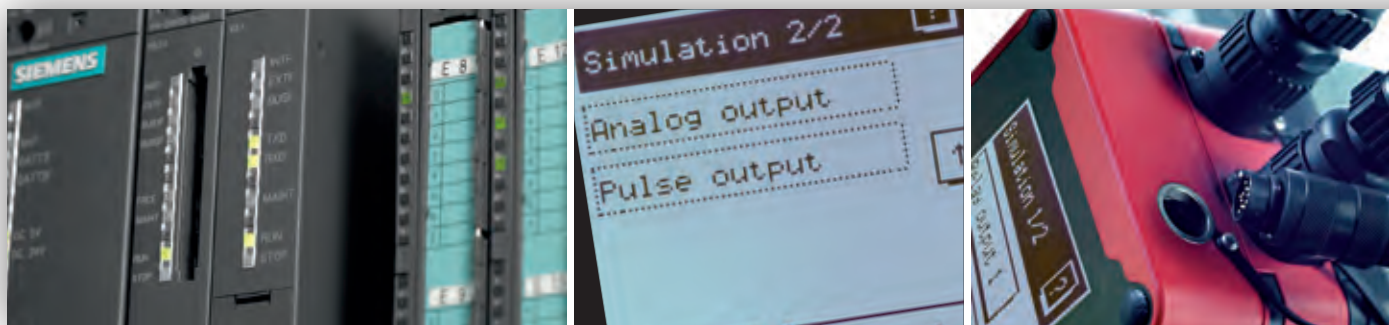

The flexible flow meter system you can rely on.

- Easy installation and commissioning
- External control/data evaluation via standard interfaces
- Installation of the modules at separate locations is possible
- The technically and economically best solution at all times



Flow measurement without volume preselection - TS

for non-flammable liquids



Flow meter type VA10 in PURE Version suitable for use in the food and cosmetics industry as well as in the pharmaceuticals.

Technical data	Type ST10	Type SL10	Type VA10
Field of application	Neutral media, such as water, mineral oils	Aggressive liquids such as acids and alkalis	Many acids, alkalis and other liquids
Flow rate	min. 10 – max. 100** l/min.	min. 10 – max. 100** l/min.	min. 10 – max. 100 l/min.
Temperature	60 °C	60 °C	80 °C
Viscosity	2,000 mPas	2,000 mPas	5,000 mPas
Operating pressure	4 bar	4 bar	10 bar
Accuracy	± 1% standard < 1% with adaptation to the operating conditions	± 1% standard < 1% with adaptation to the operating conditions	± 1%
Inlet port	G 2 male thread suitable for connection piece with wing nut	G 2 male thread suitable for connection piece with wing nut	G 1 1/4 male thread
Outlet port	G 1 1/4 male thread	G 1 1/4 male thread	G 1 1/4 male thread
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset		
Menu language	DE, GB, ES, FR, IT, NL, PT, RU		
Materials:			
Housing	PPO	PPO	Stainless steel (1.4581/ 1.4571)*
Measuring chamber	PPO/PPS	PPO/PPS	Stainless steel (1.4581/1.4571) ETFE / PTFE
Seals	FPM	FPM	FEP
Magnet	BaFe / PA / stainless steel 1.4401	PPS encapsulated	PTFE encapsulated
Protection class	IP 55	IP 55	IP 55
Weight	1.1 kg	1.1 kg	3.7 kg
Order No.	0231-000	0231-010	0231-049

* Special materials on request Information on the chemical resistance of the different flow meter variants can be found in our resistance table.

** Short-term 120 l/min.

Recommended accessories: Power supply unit NG10***

Voltage	220-230 V
Frequency	50-60 Hz
Order No.	0230-230

*** Limited battery operation possible without power supply unit.

Flow measurement without volume preselection - TS

for easily inflammable liquids



Flow meter type VA10 in PURE Version suitable for use in the food and cosmetics industry as well as in the pharmaceuticals.

Technical data	Type LM10 (Ex)	Type UN10 (Ex)	Type VA10 (Ex)
Field of application	Solvents and many other highly flammable liquids, oils and neutral liquids.	Solvents and highly flammable liquids, most of acids and alkalis..	Almost all solvents and highly flammable liquids. Many acids, alkalis and other liquids.
Flow rate	min. 10 – max. 100** l/min.	min. 10 – max. 100** l/min.	min. 10 – max. 100 l/min.
Temperature	60 °C	60 °C	60 °C
Viscosity	2,000 mPas	2,000 mPas	5,000 mPas
Operating pressure	4 bar	4 bar	10 bar
Accuracy	± 1% standard < 1% with adaptation to the operating conditions	± 1% standard < 1% with adaptation to the operating conditions	± 1%
Inlet port	G 2 male thread suitable for connection piece with wing nut	G 2 male thread suitable for connection piece with wing nut	G 1 1/4 male thread
Outlet port	G 1 1/4 male thread	G 1 1/4 male thread	G 1 1/4 male thread
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset		
Menu language	DE, GB, ES, FR, IT, NL, PT, RU		
Materials:			
Housing	PPS	PPS	Stainless steel (1.4581/1.4571)*
Measuring chamber	LCP	LCP	Stainless steel (1.4581/1.4571) ETFE/
Seals	FEP	FEP	PTFE
Magnet	BaFe / MS / stainless steel 1.4401	PPS encapsulated	FEP PTFE encapsulated
Marking:			
Operating unit	II 2G Ex ib IIB T4 Gb***	II 2G Ex ib IIB T4 Gb***	II 2G Ex ib IIB T4 Gb***
Basic flow meter	II 2G T4 Gb	II 2G T4 Gb	II 2G T4 Gb
Protection class	IP 55	IP 55	IP 55
Weight	1.1 kg	1.1 kg	3.7 kg
Order No.	0231-020	0231-030	0231-040

*Special materials on request Information on the chemical resistance of the different flow meter variants can be found in our resistance table. ** Short-term 120 l/min. *** Type of protection II 2G Ex ib IIC T4 Gb on request

Recommended accessories: Power supply unit NG10****

Voltage	220-230 V
Frequency	50-60 Hz
Order No.	0230-230

**** Limited battery operation possible without power supply unit, installation of power supply unit outside hazardous area necessary

Flow measurement with volume preselection - TS

for non-flammable liquids



Flow meter type VA10 in PURE Version suitable for use in the food and cosmetics industry as well as in the pharmaceuticals.

Technical data	Type ST10/RM10 230 V	Type SL10/RM10 230 V	Type VA10/RM10 230 V
Field of application	Neutral media, such as water, mineral oils	Aggressive liquids such as acids and alkalis	Many acids, alkalis and other liquids
Flow rate	min. 10 – max. 100** l/min.	min. 10 – max. 100** l/min.	min. 10 – max. 100 l/min.
Temperature	60 °C	60 °C	80 °C
Viscosity	2,000 mPas	2,000 mPas	5,000 mPas
Operating pressure	4 bar	4 bar	10 bar
Accuracy	± 1% standard < 1% with adaptation to the operating conditions	± 1% standard < 1% with adaptation to the operating conditions	± 1%
Inlet port	G 2 male thread suitable for connection piece with wing nut	G 2 male thread suitable for connection piece with wing nut	G 1 1/4 male thread
Outlet port	G 1 1/4 male thread	G 1 1/4 male thread	G 1 1/4 male thread
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset		
Menu language	DE, GB, ES, FR, IT, NL, PT, RU		
Materials:			
Housing	PPO	PPO	Stainless steel (1.4581/1.4571)*
Measuring chamber	PPO/PPS	PPO/PPS	Stainless steel (1.4581/1.4571) ETFE/PTFE
Seals	FPM	FPM	FEP
Magnet	BaFe / PA / Stainless steel 1.4401	PPS encapsulated	PTFE encapsulated
Protection class	IP 55	IP 55	IP 55
Weight	1.6 kg	1.6 kg	4.1 kg
Relay module RM10			
Voltage	220-230 V		
Frequency	50-60 Hz		
Switching outputs	2 switching outputs (potentially bound)		
Output 1 (Pump)	8 A, cos > 0,7		
Output 2 (Valve)	0.5 A		
Order No.	0231-001	0231-011	0231-041

* Special materials on request Information on the chemical resistance of the different flow meter variants can be found in our resistance table.

** Short-term 120 l/min.

Flow measurement with volume preselection - TS

for easily inflammable liquids



Flow meter type VA10 in PURE Version
suitable for use in the food and cosmetics industry
as well as in the pharmaceuticals.



Technical data	Type LM10 / Ex-RM10mK	Type UN10 / Ex-RM10mK	Type VA10 / Ex-RM10mK
Field of application	Solvents and many other highly flammable liquids, oils and neutral liquids.	Solvents and highly flammable liquids, most of acids and alkalis.	Almost all solvents and highly flammable liquids. Many acids, alkalis and other liquids.
Flow rate	min. 10 – max. 100** l/min.	min. 10 – max. 100** l/min.	min. 10 – max. 100 l/min.
Temperature	40 °C	40 °C	40 °C
Viscosity	2,000 mPas	2,000 mPas	5,000 mPas
Operating pressure	4 bar	4 bar	10 bar
Accuracy	± 1% standard < 1% with adaptation to the operating conditions	± 1% standard < 1% with adaptation to the operating conditions	± 1%
Inlet port	G 2 male thread suitable for connection piece with wing nut	G 2 male thread suitable for connection piece with wing nut	G 1 1/4 male thread
Outlet port	G 1 1/4 male thread	G 1 1/4 male thread	G 1 1/4 male thread
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset		
Menu language	DE, GB, ES, FR, IT, NL, PT, RU		
Materials:			
Housing	PPS	PPS	Stainless steel (1.4581/1.4571)*
Measuring chamber	LCP	LCP	Stainless steel (1.4581/1.4571) ETFE/PTFE
Seals	FEP	FEP	FEP
Magnet	BaFe / MS / stainless steel 1.4401	PPS encapsulated	PTFE encapsulated
Marking:			
Operating unit	II 2G Ex ib IIB T4 Gb***	II 2G Ex ib IIB T4 Gb***	II 2G Ex ib IIB T4 Gb***
Basic flow meter	II 2G T4 Gb	II 2G T4 Gb	II 2G T4 Gb
Protection class	IP 55	IP 55	IP 55
Weight	4.4 kg	4.4 kg	6.7 kg
Relay module Ex-RM10mK			
Voltage	220-230 V		
Frequency	50-60 Hz		
Switching outputs	2 switching outputs (potentially bound)		
Output 1 (Pump)	5 A, cos > 0,7		
Output 2 (Valve)	0.315 A		
Marking	II 2G Ex db eb mb [ib] IIC T4 Gb		
Order No.	0231-023	0231-033	0231-043

* Special materials on request. Information on the chemical resistance of the different flow meter variants can be found in our resistance table.

** Short-term 120 l/min.

*** Type of protection II 2G Ex ib IIC T4 Gb on request

Lutz flow meter programme

Series HDO: Oval gear principle




Product features

The flow meters in plastic and metal design work according to the oval gear principle. They are suitable for pumping thin-bodied to highly viscous liquids.

- For high flow rates, temperatures and pressures
- Few construction and wear parts
- Low pressure losses in the system




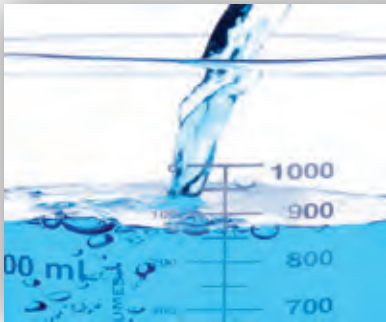

How the HDO works

Two interlocked oval gears, offset by 90° in the meter housing, are set in rotation by the flowing liquid. A defined volume of liquid is transported "in portions" through the two oval wheels. Magnets placed on the measuring wheels are also set in rotation.

A reed contact mounted outside the measuring chamber records the magnetic pulses generated. The volume of the liquid flowing through is determined by the number of pulses detected.

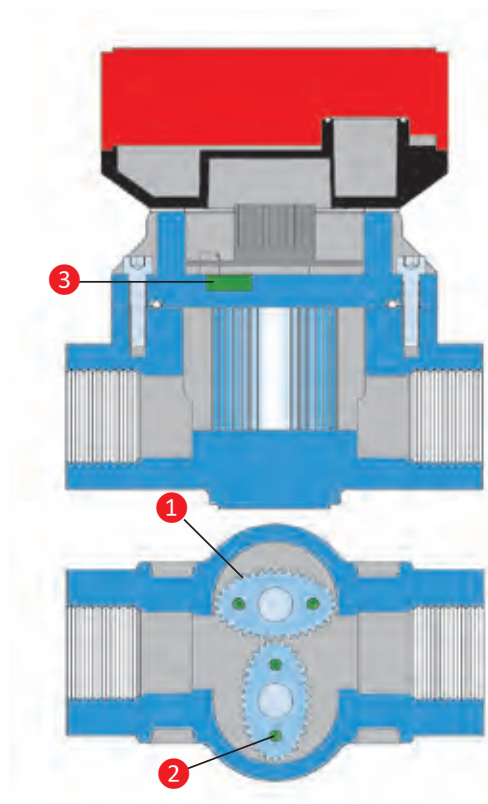

- 1 Oval gears
- 2 Permanent magnets
- 3 Reed contact

Lutz flow meter HDO 080 with pulse output

for very small flow rates

- ✓ Metal housing
- ✓ for very small flow rates up to 8.3 l/min.
- ✓ compact basic flow meter with 0.3 m connection cable and plug for connection to external operating unit
- ✓ for neutral liquids, many acids and alkalis, petroleum products, highly flammable hydrocarbons, solvents, paints and lacquers, etc.
- ✓ with threaded connection



Technical data	Type HDO 080 SS/SS
Measuring range: below 5 mPas above 5 mPas	0.44 l/min up to 8.3 l/min 0.25 l/min up to 8.3 l/min
Temperature	max. 80 °C
Viscosity max.	1,000 mPas
Operating pressure max.	16 bar
Measuring accuracy	below 5 mPas $\pm 2,5\%$ of measured value above 5mPas $\pm 1\%$ of measured value
Reproducibility	$\pm 0.03\%$
Nominal width	DN 8
Connections: Thread / flange	G 1/4 IT
LCD display	Basic flow meter without operating unit (Suitable operating unit) BE10/BE10 Ex see accessories)
Materials: Housing Measuring wheels Shaft Sealing	Stainless steel (1.4571) Stainless steel (1.4571) Stainless steel (1.4571) FPM (alt. FFPM, EPDM)*
Weight	0.7 kg
Marking: Basic flow meter	II 2G Ex h IIB T4 Gb
Order No.	Thread
up to 1000 mPas	0230-600


Optional:

* Additional price seal FFPM order no. 0230-316

Additional price seal EPDM order no. 0230-322

Lutz Flow Meter HDO 120

for non-flammable and easily flammable liquids

- ✓ Metal housing
- ✓ For small flow rates up to 30 l/min.
- ✓ **Non explosion-proof version:**
for neutral liquids, many acids and alkalis, mineral oil products, paints and lacquers, etc.
- ✓ **Ex version:** 
for flammable mineral oil products, highly flammable hydrocarbons and other chemicals in explosive environments.
- ✓ with threaded connection



Technical data	Type HDO 120 Alu/LCP	Type HDO 120 SS/SS
Measuring range:		
below 5 mPas	2 l/min up to 25 l/min	2 l/min up to 25 l/min
above 5 mPas	1 l/min up to 30 l/min	1 l/min up to 30 l/min
Temperature	max. 80 °C (60 °C**)	max. 120 °C (60 °C**)
Viscosity max.	1,000 mPas	1,000 mPas
Operating pressure max.	16 bar	16 bar
Measuring accuracy	below 5mPas ± 2% of measured quantity above 5mPas ± 0.5% of measured quantity	below 5mPas ± 2% of measured value above 5mPas ± 0,5% of measured value
Reproducibility	± 0.03%	± 0.03%
Nominal width	DN 12	DN 12
Connections:		
Thread / flange	G 1/2 IT	G 1/2 IT
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset	
Menu language	DE, GB, ES, FR, IT, NL, PT, RU	
Materials:		
Housing	Aluminium	Stainless steel (1.4404)
Measuring wheels	LCP	Stainless steel (1.4404)
Shaft	Stainless steel (1.4404)	Stainless steel (1.4404)
Sealing	FPM (alt. FFPM, EPDM)*	FPM (alt. FFPM, EPDM)*
Protection class	IP 55	IP 55
Weight	2.1 kg	4.5 kg
Order No.	Thread	Thread
up to 1000 mPas	0231-101	0231-100

Technical data	Type HDO 120 Alu/LCP Ex	Type HDO 120 SS/SS Ex
Marking:		
Operating unit	II 2G Ex ib IIB T4 Gb*** 	II 2G Ex ib IIB T4 Gb*** 
Basic flow meter	II 2G Ex h IIB T4 Gb	II 2G Ex h IIB T4 Gb
Order No.	Thread	Thread
up to 1000 mPas	0231-103	0231-102


Optional: *Additional price seal FFPM order no. 0230-315, additional price seal EPDM order no. 0230-321 **in Ex version *** type of protection II 2G Ex ib IIC T4 Gb on request.

Recommended accessories: Power supply unit NG10****	
Voltage	220-230 V
Frequency	50-60 Hz
Order No.	0230-230

**** Limited battery operation possible without power supply unit, installation of power supply unit outside hazardous area necessary

Lutz Flow Meter HDO 200

for non-flammable and easily flammable liquids

- ✓ Metal housing
- ✓ for small and medium-sized flow rates up to 60 l/min.
- ✓ **Non explosion-proof version:**
for neutral liquids, many acids and alkalis, mineral oil products, paints and lacquers, etc.
- ✓ **Ex version:** 
for flammable mineral oil products, highly flammable hydrocarbons and other chemicals in explosive environments.
- ✓ with threaded connection



Technical data	Type HDO 200 Alu/LCP	Type HDO 200 SS/SS
Measuring range:		
below 5 mPas	4.5 l/min up to 53 l/min	4.5 l/min up to 53 l/min
above 5 mPas	2 l/min up to 60 l/min	2 l/min up to 60 l/min
Temperature	max. 80 °C (60 °C**)	max. 120 °C (60 °C**)
Viscosity max.	1,000 mPas	1,000 mPas
Operating pressure max.	16 bar	16 bar
Measuring accuracy	below 5mPas ± 2% of measured quantity above 5mPas ± 0.5% of measured quantity	below 5mPas ± 2% of measured quantity above 5mPas ± 0.5% of measured quantity
Reproducibility	± 0.03%	± 0.03%
Nominal width	DN 20	DN 20
Connections:		
Thread / flange	G 3/4 IT	G 3/4 IT
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset	
Menu language	DE, GB, ES, FR, IT, NL, PT, RU	
Materials:		
Housing	Aluminium	Stainless steel (1.4404)
Measuring wheels	LCP	Stainless steel (1.4404)
Shaft	Stainless steel (1.4404)	Stainless steel (1.4404)
Sealing	FPM (alt. FFPM, EPDM)*	FPM (alt. FFPM, EPDM)*
Protection class	IP 55	IP 55
Weight	2.2 kg	4.8 kg
Order No.	Thread	Thread
up to 1000 mPas	0231-105	0231-104

Technical data	Type HDO 200 Alu/LCP Ex	Type HDO 200 SS/SS Ex
Marking:		
Operating unit	II 2G Ex ib IIB T4 Gb*** 	II 2G Ex ib IIB T4 Gb*** 
Basic flow meter	II 2G Ex h IIB T4 Gb	II 2G Ex h IIB T4 Gb
Order No.	Thread	Thread
up to 1000 mPas	0231-107	0231-106


Optional: *Additional price seal FFPM order no. 0230-315, additional price seal EPDM order no. 0230-321 **in Ex version *** type of protection II 2G Ex ib IIC T4 Gb on request.

Recommended accessories: Power supply unit NG10****	
Voltage	220-230 V
Frequency	50-60 Hz
Order No.	0230-230

**** Limited battery operation possible without power supply unit, installation of power supply unit outside hazardous area necessary




Lutz Flow Meter HDO 250

for non-flammable and easily flammable liquids

- ✓ Housing made of plastic or metal
- ✓ for small and medium-sized flow rates up to 170 l/min.
- ✓ **Non explosion-proof version:**
For neutral liquids, many acids and alkalis, mineral oil products, paints and lacquers, etc.
- ✓ **Ex version:** 
for flammable mineral oil products, highly flammable hydrocarbons and other chemicals in explosive environments.
- ✓ with threaded or flanged connection



Technical data	Type HDO 250 PVDF/PPS	Type HDO 250 Alu/PPS		Type HDO 250 SS/PPS		Type HDO 250 SS/SS	
Measuring range:							
below 5 mPas	6 l/min up to 120 l/min	9.5 l/min up to 150 l/min		9.5 l/min up to 150 l/min		9.5 l/min up to 150 l/min	
above 5 mPas	9.5 l/min up to 120 l/min	6 l/min up to 170 l/min		6 l/min up to 170 l/min		6 l/min up to 170 l/min	
Temperature	max. 60 °C	max. 80 °C (60 °C**)		max. 80 °C (60 °C**)		max. 120 °C (60 °C**)	
Viscosity max.	1,000 mPas	500,000 mPas		500,000 mPas		500,000 mPas	
Operating pressure max.	16 bar	16 bar		16 bar		16 bar	
Measuring accuracy	below 5mPas ± 2.5% of measured quantity above 5mPas ± 1.5% of measured quantity	below 5mPas ± 2% of measured quantity above 5mPas ± 0.5% of measured quantity		below 5mPas ± 2% of measured quantity above 5mPas ± 0.5% of measured quantity		below 5mPas ± 2% of measured quantity above 5mPas ± 0.5% of measured quantity	
Reproducibility	0.03%	0.03%		0.03%		0.03%	
Nominal width	DN 25	DN 25		DN 25		DN 25	
Connections:							
Thread / flange	G 1 IT	G 1 IT	PN 16	G 1 IT	PN 16	G 1 IT	PN 16
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset						
Menu language	DE, GB, ES, FR, IT, NL, PT, RU						
Materials:							
Housing	PVDF	Aluminium		Stainless steel (1.4404)		Stainless steel (1.4404)	
Measuring wheels	PPS	PPS		PPS		Stainless steel (1.4401)	
Shaft	Hastelloy C (2.4819)	Stainless steel (1.4404)		Stainless steel (1.4404)		Stainless steel (1.4404)	
Sealing	FPM (alt. FFPM, EPDM)*	FPM (alt. FFPM, EPDM)*		FPM (alt. FFPM, EPDM)*		FPM (alt. FFPM, EPDM)*	
Protection class	IP 55	IP 55		IP 55		IP 55	
Weight	1.3 kg	2.2 kg	3.0 kg	4.7 kg	5.9 kg	4.8 kg	6.0 kg
Order No.	Thread	Thread	Flange	Thread	Flange	Thread	Flange
up to 1000 mPas	0231-190	0231-209	0231-210	0231-205	0231-206	0231-201	0231-202
up to 500000 mPas	–	0231-211	0231-212	0231-207	0231-208	0231-203	0231-204

Technical data	Type HDO 250 Alu/PPS Ex		Type HDO 250 SS/PPS Ex		Type HDO 250 SS/SS Ex	
Marking:						
Operating unit	II 2G Ex ib IIB T4 Gb***		II 2G Ex ib IIB T4 Gb***		II 2G Ex ib IIB T4 Gb***	
Basic flow meter	II 2G Ex h IIB T4 Gb 		II 2G Ex h IIB T4 Gb 		II 2G Ex h IIB T4 Gb 	
Order No.	Thread	Flange	Thread	Flange	Thread	Flange
up to 1000 mPas	0231-221	0231-222	0231-217	0231-218	0231-213	0231-214
up to 500000 mPas	0231-223	0231-224	0231-219	0231-220	0231-215	0231-216


Optional: * Additional price seal FFPM order no. 0230-312, additional price seal EPDM order no. 0230-318. Drum pump connection for connecting to a drum pump B70 / HD-E see accessories.
 ** in Ex version *** Type of protection II 2G Ex ib IIB T4 Gb on request.

Recommended accessories: Power supply unit NG10****	
Voltage	V 220-230 V
Frequency	Hz 50-60 Hz
Order No.	0230-230




**** Limited battery operation possible without power supply unit, installation of power supply unit outside hazardous area necessary

Lutz Flow Meter HDO 400

for non-flammable and easily flammable liquids

- ✓ Metal housing
- ✓ for medium-sized flow rates up to 246 l/min.
- ✓ **Non explosion-proof version:**
for neutral liquids, many acids and alkalis, mineral oil products, paints and lacquers, etc.
- ✓ **Ex version:** 
for flammable mineral oil products, highly flammable hydrocarbons and other chemicals in explosive environments.
- ✓ with threaded or flanged connection



Technical data	Type HDO 400 Alu/PPS		Type HDO 400 SS/PPS		Type HDO 400 SS/SS	
Measuring range: below 5 mPas above 5 mPas	15 l/min up to 227 l/min 9.5 l/min up to 246 l/min		15 l/min up to 227 l/min 9.5 l/min up to 246 l/min		15 l/min up to 227 l/min 9.5 l/min up to 246 l/min	
Temperature	max. 80 °C (60 °C**)		max. 80 °C (60 °C**)		max. 120 °C (60 °C**)	
Viscosity max.	500,000 mPas		500,000 mPas		500,000 mPas	
Operating pressure max.	16 bar		16 bar		16 bar	
Measuring accuracy	below 5mPas ± 1% of measured quantity above 5mPas ± 0.5% of measured quantity		below 5mPas ± 1% of measured quantity above 5mPas ± 0.5% of measured quantity		below 5mPas ± 1% of measured quantity above 5mPas ± 0.5% of measured quantity	
Reproducibility	0.03%		0.03%		0.03%	
Nominal width	DN 40		DN 40		DN 40	
Connections: Thread / flange	G 1 1/2 IT	PN 16	G 1 1/2 IT	PN 16	G 1 1/2 IT	PN 16
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset					
Menu language	DE, GB, ES, FR, IT, NL, PT, RU					
Materials: Housing Measuring wheels Shaft Sealing	Aluminium PPS Stainless steel (1.4404) FPM (alt. FFPM, EPDM)*		Stainless steel (1.4404) PPS Stainless steel (1.4404) FPM (alt. FFPM, EPDM)*		Stainless steel (1.4404) Stainless steel (1.4401) Stainless steel (1.4404) FPM (alt. FFPM, EPDM)*	
Protection class	IP 55		IP 55		IP 55	
Weight	4.5 kg	5.5 kg	10.4 kg	12.0 kg	10.5 kg	12.1 kg
Order No.	Thread	Flange	Thread	Flange	Thread	Flange
up to 1000 mPas	0231-233	0231-234	0231-229	0231-230	0231-225	0231-226
up to 500000 mPas	0231-235	0231-236	0231-231	0231-232	0231-227	0231-228
Technical data	Type HDO 400 Alu/PPS Ex		Type HDO 400 SS/PPS Ex		Type HDO 400 SS/SS Ex	
Marking: Operating unit Basic flow meter	II 2G Ex ib IIB T4 Gb*** II 2G Ex h IIB T4 Gb 		II 2G Ex ib IIB T4 Gb*** II 2G Ex h IIB T4 Gb 		II 2G Ex ib IIB T4 Gb*** II 2G Ex h IIB T4 Gb 	
Order No.	Thread	Flange	Thread	Flange	Thread	Flange
up to 1000 mPas	0231-245	0231-246	0231-241	0231-242	0231-237	0231-238
up to 500000 mPas	0231-247	0231-248	0231-243	0231-244	0231-239	0231-240

Optional: *Additional price seal FFPM order no. 0230-313, additional price seal EPDM order no. 0230-319. Drum pump connection for connecting to a drum pump B70 / HD-E see accessories.
in Ex version * Type of protection II 2G Ex ib IIC T4 Gb on request.


Recommended accessories: Power supply unit NG10****

Voltage	220-230 V
Frequency	50-60 Hz
Order No.	0230-230

**** Limited battery operation possible without power supply unit, installation of power supply unit outside hazardous area necessary




Lutz Flow Meter HDO 500

for non-flammable and easily flammable liquids

- ✓ Metal housing
- ✓ for large flow rates up to 380 l/min.
- ✓ **Non explosion-proof version:**
for neutral liquids, many acids and alkalis, mineral oil products, paints and lacquers, etc.
- ✓ **Ex version:** 
for flammable mineral oil products, highly flammable hydrocarbons and other chemicals in explosive environments.
- ✓ with flange connection



Technical data	Type HDO 500 Alu/PPS	Type HDO 500 SS/PPS	Type HDO 500 SS/SS
Measuring range: below 5 mPas above 5 mPas	23 l/min up to 380 l/min 15 l/min up to 380 l/min	23 l/min up to 380 l/min 15 l/min up to 380 l/min	23 l/min up to 380 l/min 15 l/min up to 380 l/min
Temperature	max. 80 °C (60 °C**)	max. 80 °C (60 °C**)	max. 120 °C (60 °C**)
Viscosity max.	500,000 mPas	500,000 mPas	500,000 mPas
Operating pressure max.	16 bar	16 bar	16 bar
Measuring accuracy	below 5mPas ± 1% of measured quantity above 5mPas ± 0.5% of measured quantity	below 5mPas ± 1% of measured quantity above 5mPas ± 0.5% of measured quantity	below 5mPas ± 1% of measured quantity above 5mPas ± 0.5% of measured quantity
Reproducibility	0.03%	0.03%	0.03%
Nominal width	DN 50	DN 50	DN 50
Connections: Flange	PN 16	PN 16	PN 16
LCD display	Touch-Screen 63x63 mm, 128x128 pixels, display sub-total and total volume can be reset		
Menu language	DE, GB, ES, FR, IT, NL, PT, RU		
Materials:			
Housing	Aluminium	Stainless steel (1.4404)	Stainless steel (1.4404)
Measuring wheels	PPS	PPS	Stainless steel (1.4401)
Shaft	Stainless steel (1.4404)	Stainless steel (1.4404)	Stainless steel (1.4404)
Sealing	FPM (alt. FFPM, EPDM)*	FPM (alt. FFPM, EPDM)*	FPM (alt. FFPM, EPDM)*
Protection class	IP 55	IP 55	IP 55
Weight	6.6 kg	13.6 kg	13.8 kg
Order No.	Flange	Flange	Flange
up to 1000 mPas	0231-253	0231-251	0231-249
up to 500000 mPas	0231-254	0231-252	0231-250

Technical data	Type HDO 500 Alu/PPS Ex	Type HDO 500 SS/PPS Ex	Type HDO 500 SS/SS Ex
Marking:			
Operating unit	II 2G Ex ib IIB T4 Gb*** 	II 2G Ex ib IIB T4 Gb*** 	II 2G Ex ib IIB T4 Gb*** 
Basic flow meter	II 2G Ex h IIB T4 Gb	II 2G Ex h IIB T4 Gb	II 2G Ex h IIB T4 Gb
Order No.	Flange	Flange	Flange
up to 1000 mPas	0231-259	0231-257	0231-255
up to 500000 mPas	0231-260	0231-258	0231-256

Optional: *Additional price seal FFPM order no. 0230-314, additional price seal EPDM order no. 0230-320. **in Ex version *** Type of protection II 2G Ex ib IIC T4 Gb on request.

Recommended accessories: Power supply unit NG10****

Voltage	220-230 V
Frequency	50-60 Hz
Order No.	0230-230

**** Limited battery operation possible without power supply unit, installation of power supply unit outside hazardous area necessary

Accessories programme Lutz flow meters

for mobile and stationary application




So you always know what's going on.

The wide range of accessories offers you the option of installing the flow meter on a pump or in a pipe. With suitable connection cables, the system is quickly ready for use.

Range of accessories

Flow meter TSB without volume preselection

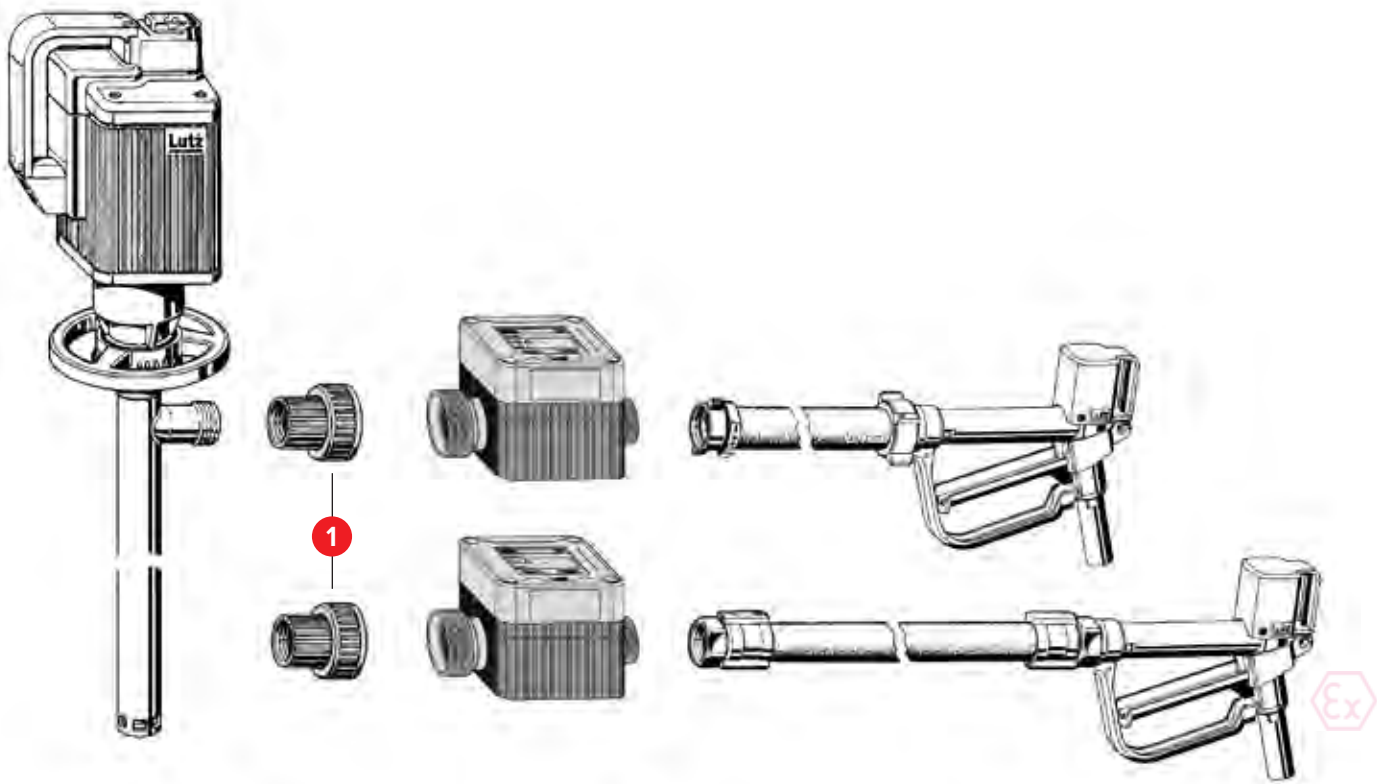


... in threaded design

1 Drum pump connection


Range of accessories

Flow meter TS without volume preselection

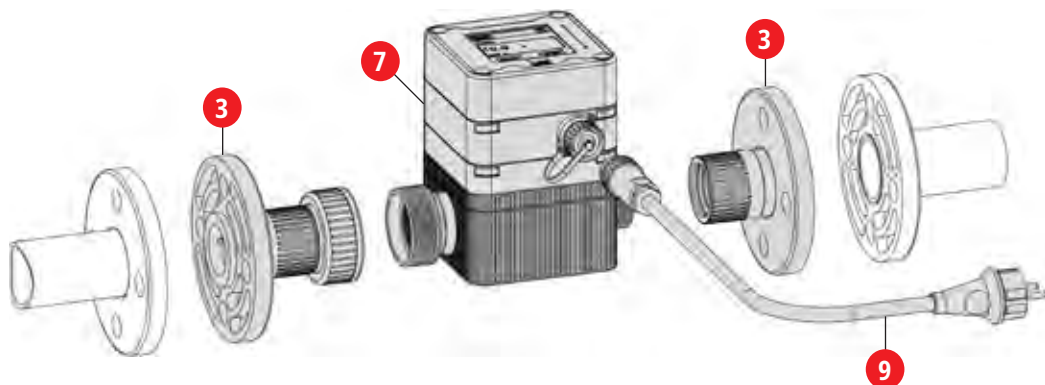

... with power supply unit in plant engineering

- 3** Flange connection
- 7** Power supply NG10
- 9** Power supply cable

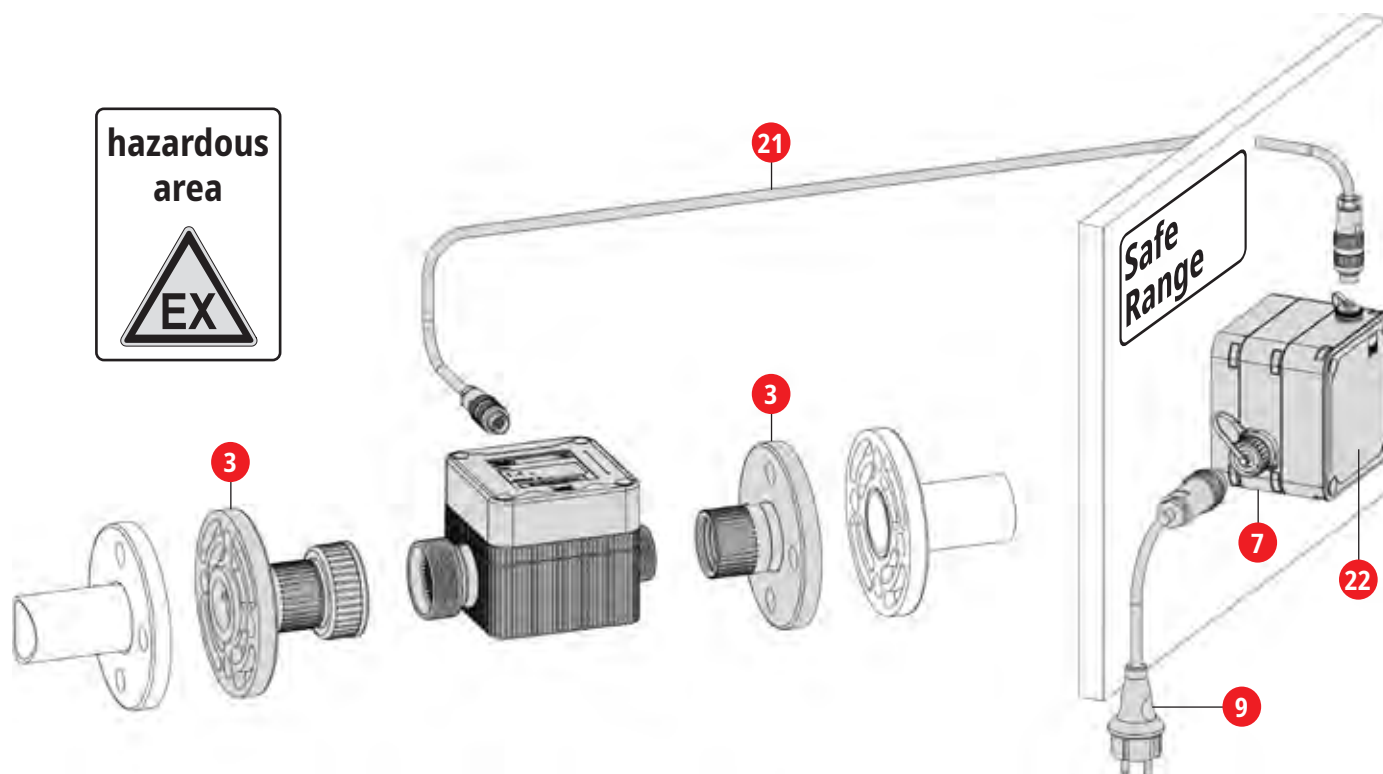


... with power supply unit in plant engineering (Ex)

- 3** ● Flange connection
- 7** Power supply NG10
- 9** Power supply cable
- 21** Data line
- 22** Protection cap SH10


Range of accessories

Flow measurement with volume preselection

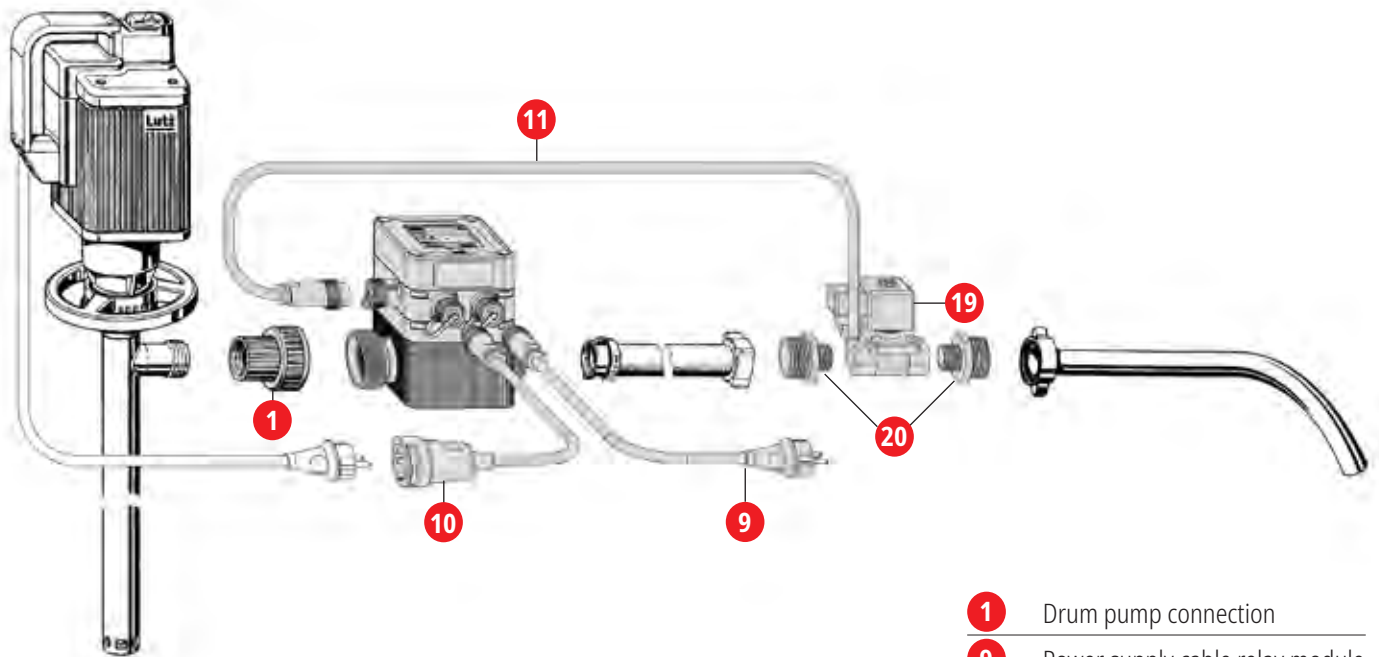

... in threaded design

- 1** Drum pump connection
- 9** Power supply cable relay module
- 10** Connection cable motor/slow 1-way
- 11** Connection cable main valve
- 19** Solenoid valve
- 20** Double nipple

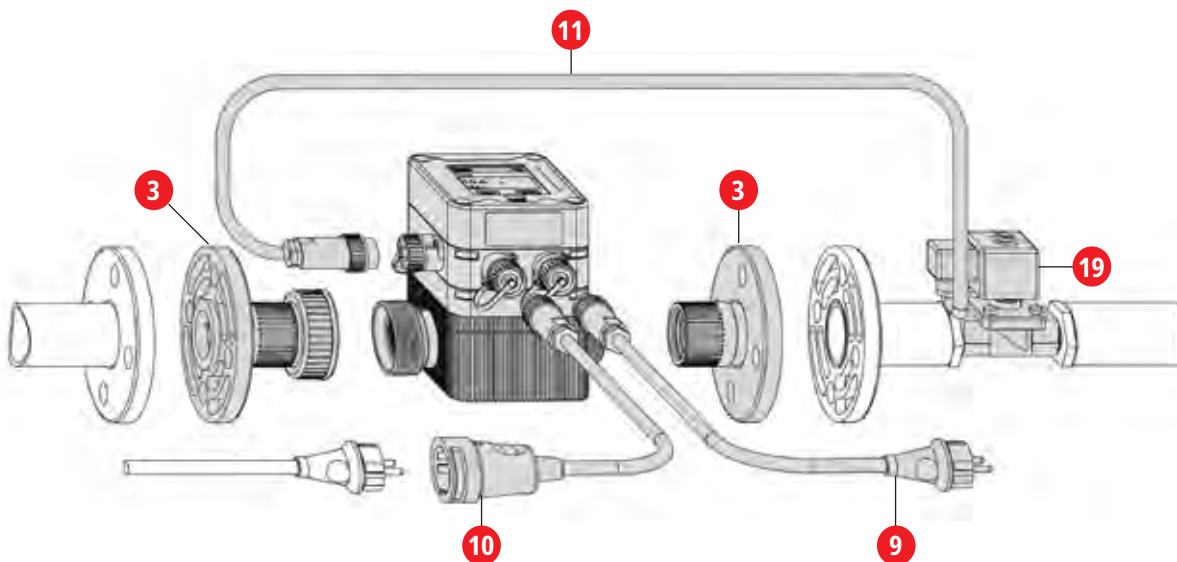

... in flange design

- 3** Flange connection
- 9** Power supply cable relay module
- 10** Connection cable motor/slow 1-way
- 11** Connection cable main valve
- 19** Solenoid valve


Flow measurement with volume preselection

... with threaded connection on a B70V three-phase driven eccentric screw pump

- 28


Range of accessories

Flow measurement with volume preselection

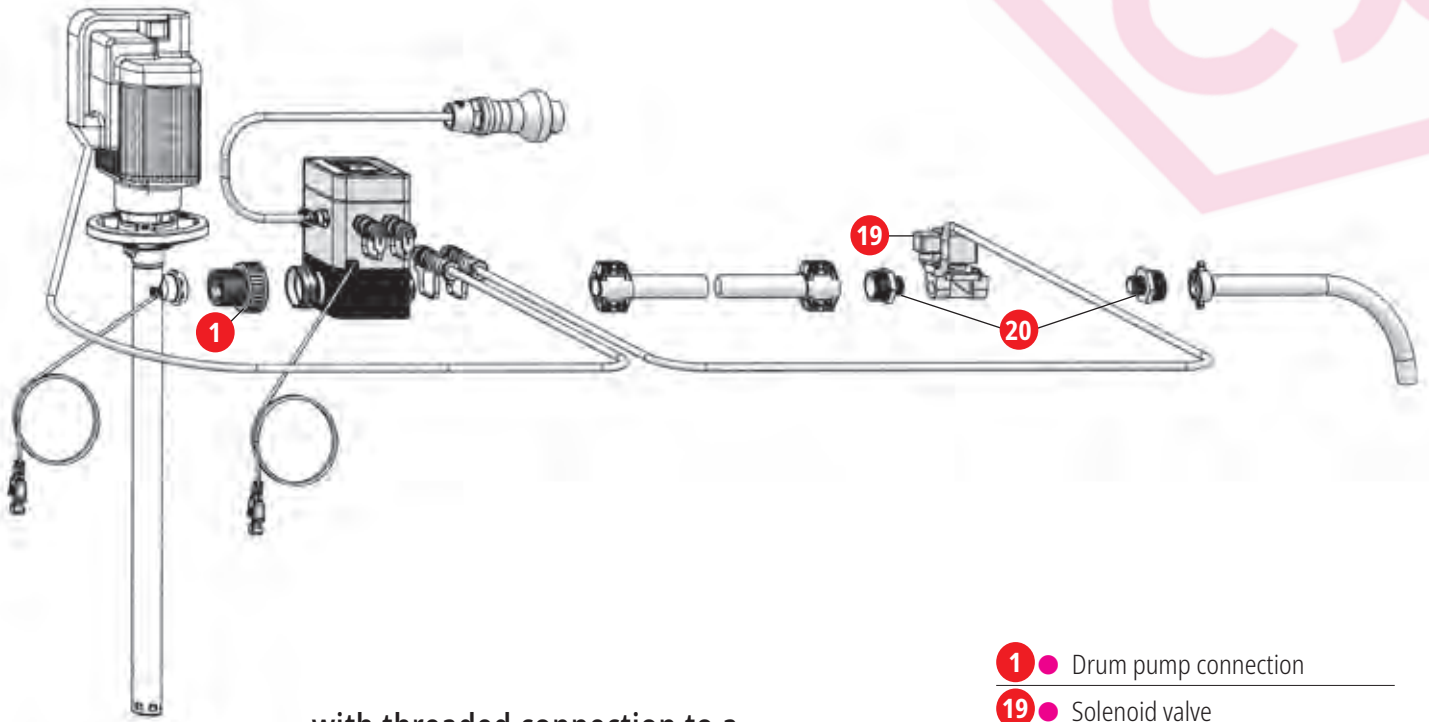

... with threaded connection to a drum and container pump (Ex)

- 1 Drum pump connection
- 19 Solenoid valve
- 20 Double nipple

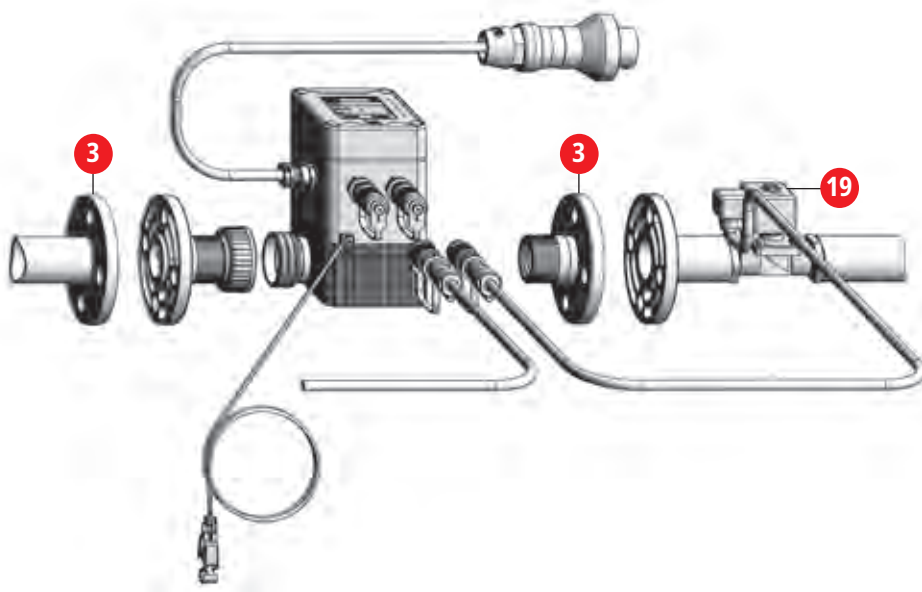







... with flange connection in plant engineering (Ex)

- 3 Flange connection
- 19 Solenoid valve

Range of accessories

Connection fittings

Product detail	Specification	Order No.
	1 Drum pump connection connects the flow meter to a drum and container pump. PPO/FPM G 1 1/4 IT for ST10, SL10 PPS/FPM-FEP G 1 1/4 IT for LM10, UN10 Stainless steel/PTFE G 1 1/4 - G 1 1/4 IT for VA10 Stainless steel/PTFE G 1 1/4 - G 1 1/2 IT for VA10	0211-130 0211-132 ● 0211-211 ● 0211-214 ●
	1 Drum pump connection connects the flow meter to an eccentric screw pump B70V or HD-E PP/PTFE G 1 OT x G 1 1/4 IT for HDO250 PVDF Stainless steel/PTFE G 1 OT x G 1 1/4 IT for HDO250 Stainless steel/PTFE G 1 OT x G 1 1/2 IT for HDO250	0211-332 0211-330 ● 0211-331 ●
	2 Double nipple connects the flow meter to the hose line PP G 1 OT x G 1 1/4 OT, for drum pump connection G 1 OT x G 1 1/4 IT Stainless steel G 1 OT x G 1 1/4 OT, for drum pump connection G 1 OT x G 1 1/4 IT Stainless steel G 1 OT x G 1 1/2 OT, for drum pump connection G 1 OT x G 1 1/2 IT *additional spacer ring 0231-545 is required	0373-076* 5000-073* 0211-340*
	3 Flange connection connects the flow meter to the piping system. PPO/FPM DN 32, PN 10 on both sides for ST10, SL10 PPS/FPM-FEP DN 32, PN 10 on both sides for LM10, UN10 Stainless steel DN 25, PN 6, one-sided for VA10 Stainless steel DN 32, PN 6, one-sided for VA10 Stainless steel DN 32, PN 10, one-sided for VA10 Stainless steel DN 40, PN 10, one-sided for VA10	0211-131 0211-133 ● 0208-620 ● 0208-621 ● 0208-622 ● 0208-623 ●
	4 Threaded connection connects the flow meter to screw flanges or threaded screw connections. PPO/FPM G 1 1/4 OT for ST10, SL10 PPS/FPM-FEP G 1 1/4 OT for LM10, UN10	0211-135 0211-136 ●
	Check valve prevents the liquid from flowing back in the full hose system. PTFE/FPM for ST10, SL10 PTFE/FPM-FEP for LM10, UN10 Opening pressure: 0.05 bar	0211-140 0211-141 ●

FPM is a registered trademark of DuPont Performance Elastomers.

● Suitable for pumping flammable and highly inflammable liquids (e.g. ethanol, petrol) or in explosive environments.

Range of accessories

For volume preselection




Specification	Order No.	Product detail
5 Relay module RM10 enables a volume preselection with the corresponding connection cables. 220-230 V, 50-60 Hz, II (2) G [Ex ib Gb] IIC for ST10, SL10, VA10 HDO080, HDO120, HDO200, HDO250, HDO400, HDO500	0230-200	
5 Relay module Ex-RM10mK (complete version) enables filling with volume preselection in the hazardous area. Ex plug-in connections according to „mini CLIX®/eXLink-System®“ with 5 m connection cable and 3-pole Ex plug (CEAG), incl. data cable 5 m and coupling plug 14-pole. 220-230 V, 50-60 Hz, II 2G Ex eb mb [ib] IIC T4 Gb for LM10, UN10, VA10, HDO080Ex, HDO120Ex, HDO200Ex, HDO250Ex, HDO400Ex, HDO500Ex	0230-211 ●	
5 Relay module Ex-RM10mB (basic version) enables filling with volume preselection in the hazardous area. Without plug connections, accessories on request, incl. data cable 5 m and coupling plug 14-pole. 220-230 V, 50-60 Hz, II 2G Ex eb mb [ib] IIC T4 Gb for LM10, UN10, VA10, HDO080Ex, HDO120Ex, HDO200Ex, HDO250Ex, HDO400Ex, HDO500Ex	0230-210 ●	
6 Relay module RM30 enables a volume preselection with the corresponding connection cables. For controlling three-phase motors. 400 V, 1,5 kW, 50 Hz or 230 V, 0,8 kW, 50 Hz, II (2) G [Ex ib Gb] IIC for ST10, SL10, VA10 HDO080, HDO120, HDO200, HDO250, HDO400, HDO500	0230-220	
7 Power supply unit NG10 230V takes over the power supply of the control unit instead of the batteries. Relay modules already include this function. 220-230 V, 50-60 Hz, II (2) G [Ex ib Gb] IIC for ST10, SL10, VA10 HDO080, HDO120, HDO200, HDO250, HDO400, HDO500	0230-230	
7 Power supply unit Ex-NG10m 230V takes over the power supply of the control unit instead of the batteries. Relay modules already include this function, with 5 m connecting cable and 3-pole Ex-plug (CEAG) 220-230 V, 50-60 Hz, II 2G Ex eb mb [ib] IIC T4 Gb for LM10, UN10, VA10 HDO120 Ex, HDO200 Ex, HDO250 Ex, HDO400 Ex, HDO500 Ex	0230-240 ●	

eXLink-System® is a registered trademark of Cooper Crouse-Hinds GmbH

● Suitable for pumping flammable and highly inflammable liquids (e.g. ethanol, petrol) or in explosive environments.








Range of accessories

For volume preselection

Product detail	Specification	Order No.
	<p>Communication module enables communication with other controllers Analogue output (0-20mA, 4-20mA, 0-10V), pulse output, RS485 interface, alarm output, digital input (ext. Start/Stop)</p> <p>8 Communication module KM10K (complete version) with screwed cable glands für ST10, SL10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500</p>	0230-101
	<p>9 Power supply cable relay module 5 m long 230 V, 50 Hz for RM10, NG10</p>	0211-155
	<p>10 Connection cable motor/slow 1-way 0.5 m long 230 V, 50 Hz for RM10</p>	0211-153
	<p>Connection cable motor/slow 3-way 0.5 m long 230 V, 50 Hz for RM10</p>	0211-154

Range of accessories




For volume preselection

Specification	Order No.	Product detail
11 Connection cable main valve 5 m long 230 V, 50 Hz for RM10 und RM30	0211-150	
12 Connection cable slow valve 5 m long 230 V, 50 Hz for RM10	0211-151	
13 Extension cable 5 m long 230 V, 50 Hz for RM10	0211-152	
14 Power supply cable RM30 400 V 5 m long 400 V, 50 Hz, 5-pole for RM30	0211-388	
15 Plug-in connector relay module for individual wiring Plug for motor/valve connection 230 V, 50 Hz, 4-pole 230 V, 50 Hz, „mini CLIX®/eXLink-System®“ Coupling for mains connection 230 V, 50 Hz, 4-pole	for RM10 for Ex-RM10mK for RM10	0336-095 0336-108* 0336-099
16 Connection cable motor RM30 400 V 0.6 m long 400 V, 50 Hz, 5-pole for RM30	0211-386	
17 Power supply cable RM30 230 V 5 m long 230 V, 50 Hz for RM30	0211-387	
18 Connection cable motor RM30 230 V 0.5 m long 230 V, 50 Hz for RM30	0211-385	

*Special Crimp tool required for the connection eXLink-System® is a registered trademark of the Cooper Crouse-Hinds GmbH

Range of accessories

For volume preselection

Product detail	Specification	Order No.
	19 Solenoid valve brass Seal FPM, connection G 3/4 IT 230 V, 50 Hz	for RM10 and RM30 0211-096
	19 Solenoid valve stainless steel Seal FPM, connection G 3/4 IT 230 V, 50 Hz	for RM10 and RM30 0211-097
	19 Solenoid valve PVC Seal PTFE, connection G 1 1/4 OT, incl. 5 m connection cable 230 V, 50/60 Hz	for RM10 and RM30 0211-399
	19 Solenoid valve brass, Ex Seal PTFE, connection G 3/4 IT, incl. 5 m connection cable and "mini CLIX®/eXLink®plug" 230 V, 50 Hz, II 2G Ex eb mb IIC T3 Gb	for Ex-RM10mK 0211-396 ●
	19 Solenoid valve stainless steel, Ex Seal PTFE, connection G 3/4 IT, incl. 5 m connection cable and "mini CLIX®/eXLink®plug" 230 V, 50 Hz, II 2G Ex eb mb IIC T3 Gb	for Ex-RM10mK 0211-395 ●
	20 Double nipple PP G 3/4 OT – G 1 1/4 OT	0211-606
	Double nipple brass G 3/4 OT – G 1 1/4 OT	0204-346 ●
	Double nipple stainless steel G 3/4 OT – G 1 1/4 OT	0204-347 ●

● Suitable for pumping flammable and highly inflammable liquids (e.g. ethanol, petrol) or in explosive environments.

Range of accessories

Other installation accessories

Specification	Order No.	Product detail
<p>21 Data line connects the modules in case of decentralised installation.</p> <p>14-pole, 5 m long for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-306 ●</p> <p>14-pole, 10 m long for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-309 ●</p> <p>Data line SPS for connecting a basic flow meter with protection cap to a programmable logic controller (PLC). 14-pole, with one free cable end, 5 m long 0230-317 ●</p> <p>Push-button data line for connecting a push-button to the operating unit/protective cover, 14-pole, with one free cable end, 5 m long 0230-332 ●</p>		
<p>22 Protective cap SH10 with 1 data socket protects the modules for decentralised installation. for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-350 ●</p> <p>22 Protective cap SH20 with 2 data sockets protects the modules for decentralised installation. for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-351 ●</p>		
<p>Pulse converter for signal amplification, must be mounted on the basic flow meter, if the next module is more than 5 m away.</p> <p>23 Pulse converter IW10 with 1 data socket for ST10, SL10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-352</p> <p>23 Pulse converter IW20 with 2 data socket for ST10, SL10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-353</p>		
<p>24 Intermediate plate For wall mounting or as heat protection plate for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-304 ●</p>		
<p>25 Wall bracket set additional clamp fixing for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-307 ●</p> <p>Installation together with intermediate plate 0230-304. (Intermediate plate not included in wall bracket set)</p>		
<p>26 Hose bracket for operating unit for decentralised installation of the modules on a hose line for ST10, SL10, LM10, UN10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500 0230-303 ●</p>		

● Suitable for pumping flammable and highly inflammable liquids (e.g. ethanol, petrol) or in explosive environments.

Range of accessories

Product detail	Specification	Order No.
	27 Operating unit BE10 for ST10, SL10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500	0230-000
	27 Operating unit BE10 V with encapsulated electronics für ST10, SL10, VA10, HDO080, HDO120, HDO200, HDO250, HDO400, HDO500	0230-001
	27 Operating unit Ex-BE10B II 2G Ex ib IIB T4 Gb for LM10, UN10, VA10, HDO080Ex, HDO120Ex, HDO200Ex, HDO250Ex, HDO400Ex, HDO500Ex	0230-010 ●
	27 Operating unit Ex-BE10BV with encapsulated electronics II 2G Ex ib IIB T4 Gb for LM10, UN10, VA10, HDO080Ex, HDO120Ex, HDO200Ex, HDO250Ex, HDO400Ex, HDO500Ex	0230-011 ●
	27 Operating unit Ex-BE10C II 2G Ex ib IIC T4 Gb for LM10, UN10, VA10, HDO080Ex, HDO120Ex, HDO200Ex, HDO250Ex, HDO400Ex, HDO500Ex	0230-020 ●
	27 Operating unit Ex-BE10CV with encapsulated electronics II 2G Ex ib IIC T4 Gb for LM10, UN10, VA10, HDO080Ex, HDO120Ex, HDO200Ex, HDO250Ex, HDO400Ex, HDO500Ex	0230-021 ●

● Suitable for pumping flammable and highly inflammable liquids (e.g. ethanol, petrol) or in explosive environments.




Range of accessories

Basic flow meter for decentralised mounting and external data evaluation

If there are larger distances between the measuring and control points or if the installation locations in the system are difficult to access, the individual modules (basic flow meter, operating unit, relay module, etc.) can be installed separately from each other. The data transmission between the components is established without cumbersome

wiring by means of plug-in connections via a data line and a protective cap/pulse converter.

A communication module is required for data transmission to an external signal processing system (e.g. PLC).

Specification	Order No.	Product detail
28 Basic flow meter ST10 (FPM) PPO/PPS/BaFe/FPM Basic flow meter SL10 (FPM) PPO/PPS/FPM Basic flow meter LM10 (FPM-FEP) PPS/LCP/BaFe/FPM-FEP II 2G T4 Gb Basic flow meter UN10 (FPM-FEP) PPS/LCP/FPM-FEP II 2G T4 Gb	0230-500 0230-510 0230-520 ● 0230-530 ●	
28 Basic flow meter VA10 (FPM-FEP) Stainless steel 1.4571/PTFE/FEP II 2G T4 Gb	0230-540 ●	
28 Basic flow meter HDO II 2G c T4 Gb (SS/Alu)	on request ●	

● Suitable for pumping flammable and highly inflammable liquids (e.g. ethanol, petrol) or in explosive environments.

Twice the **COMPETENCE...**



Professional Fluid Management

Drum pump sets

Drum and container pumps

Eccentric screw drum pumps

Flow meter systems

Air operated double diaphragm pumps

Vertical and horizontal centrifugal pumps



Lutz Pumpen GmbH

Erlenstraße 5-7 · D-97877 Wertheim · Phone: (+49 93 42) 8 79-0 · Fax: (+49 93 42) 87 94 04 · E-Mail: info@lutz-pumpen.de

www.lutz-pumpen.de

...simply **UNIQUE**



A Measured Step Forward



Dosing pumps and accessories


Chlorinators

Measuring and control technology

System and process technology

Chemical centrifugal pumps

Water disinfection



Lutz-Jesco GmbH

Am Bostelberge 19 · D-30900 Wedemark · Phone (+49 51 30) 58 02-0 · Fax (+49 51 30) 58 02 68 · E-Mail: info@lutz-jesco.com

www.lutz-jesco.com



Lutz Pumpen GmbH

Erlenstraße 5-7
D-97877 Wertheim
Phone: +49 93 42 / 8 79-0
Fax: +49 93 42 / 87 94 04
E-Mail: info@lutz-pumpen.de

www.lutz-pumpen.de

Now to the newsletter
and never miss any news!



**Follow
us on:**

